

Cooper Bussmann

Homepage
About Cooper Bussmann
Contact Us
Privacy
Legal
Cooper Bussmann® Brand
Site Map

**FNQ-1**

Time-Delay Supplementary Fuse, 500V, 1A, 13/32 - 1-1/2 Inches

Product Information

| | |
|-----------------|------------------|
| Product Type: | Fuse |
| Product Family: | Electrical Power |
| Brand: | Cooper Bussmann |

Recommended Products

| | |
|-------------------------------|-------------------------------|
| Rec. Fuse Block: | BM603 Series |
| Rec. Inline Fuse Holder: | HEB Series |
| Rec. Panel-mount Fuse Holder: | HPS Series |
| Rec. Modular Fuse Holder: | CHM Series |
| Rec. Fuse Clips: | 5960 Series |
| Rec. Cover: | SAMI-7 Series |

Physical Properties

| | |
|-------------|----------------------------------|
| Dimensions: | 1.5in.(L) × 0.41in.(W) × 0in.(H) |
|-------------|----------------------------------|

Certifications[UL Listed](#)[CSA Certified](#)**Electrical Properties**


| | |
|--------------------------|---|
| Maximum AC Voltage: | 500 |
| Amperage Rating: | 1 |
| AC Interrupting Ratings: | <ul style="list-style-type: none">• 10000 at 500V |
| Time Delay: | Yes |

Tron® Time-Delay Fuses

FNQ

13/32" x 1-1/2" Midget

500 Volt, 1/10-30 Amps



- Fibre tube.
- Nickel plated brass endcaps.
- For motor control transformers and other circuits with in-rush currents.

Catalog Symbol: FNQ (5AG)

TIME-DELAY

1/10 TO 30A

500Vac (OR LESS)

Interrupting Rating:10,000A

UL LISTED, STD 248-14, (GUIDE # JDYX, FILE # E19180)

CSA CERTIFIED (CLASS 1422-01; FILE 53787)

Catalog Symbol and Ampere Ratings


| | | | |
|------------|------------|------------|--------|
| FNQ-1/10 | FNQ-8/10 | FNQ-3-2/10 | FNQ-9 |
| FNQ-1/8 | FNQ-1 | FNQ-3-1/2 | FNQ-10 |
| FNQ-15/100 | FNQ-1-1/8 | FNQ-4 | FNQ-12 |
| FNQ-3/16 | FNQ-1-1/4 | FNQ-4-1/2 | FNQ-14 |
| FNQ-2/10 | FNQ-1-1/2 | FNQ-5 | FNQ-15 |
| FNQ-1/4 | FNQ-1-6/10 | FNQ-5-6/10 | FNQ-20 |
| FNQ-3/10 | FNQ-2 | FNQ-6 | FNQ-25 |
| FNQ-4/10 | FNQ-2-1/4 | FNQ-6-1/4 | FNQ-30 |
| FNQ-1/2 | FNQ-2-1/2 | FNQ-7 | — |
| FNQ-6/10 | FNQ-3 | FNQ-8 | — |

Carton Quantity and Weight

| Ampere Ratings | Carton Qty | Weight* | |
|----------------|------------|---------|------|
| | | Lbs. | Kg. |
| 1-30 | 10 | .180 | .082 |

* Weight per carton.

Time-Current Characteristic Curve—Average Melt

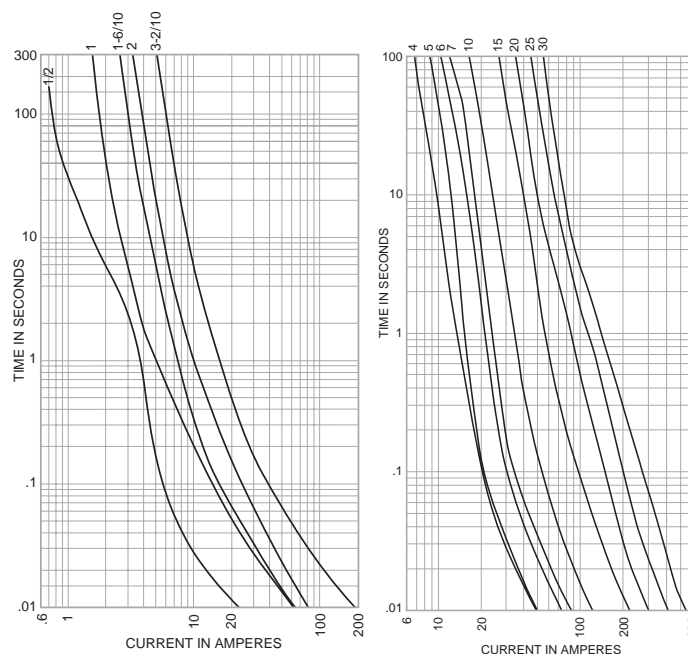

RMS SYMMETRICAL IN AMPERES



Recommended fuseblocks/fuseholders for 13/32" x 1-1/2" fuses

See Data Sheets listed below

- Open fuseblocks - 1104, 2104
- Finger-safe fuseholders - 1109, 1102, 1103, 1151
- Panel-mount fuseholders - 2114, 2113, 2108, 2112, 2109, 2140
- In-line fuseholders - 2127, 2126

CE